

Installation Guidelines

Step 1: Prepare the Speaker Cable

- Measure and cut the speaker cable to the desired length.
- Strip approximately 3/4 inch of the outer insulation from the end of the cable to expose the inner wires, then strip about 1/4 inch of the insulation from the positive (red) and negative (white) wires.




Step 2: Wire Insertion

- Disassemble the connector carefully to avoid losing components.
- Unscrew the terminal screws to access wire terminals.
- Insert the speaker cable into the SR sheath and cable clip in sequence.



Step 3: Assemble the Connector

- Insert positive wire (usually Red/Blue) to terminal 1+ and negative wire (usually White/Black) to terminal 1-.
- Secure the wires by tightening the terminal screws, ensuring no bare wire is exposed.
- Reassemble the connector housing around the wired terminal, ensuring it snaps or screws back securely.

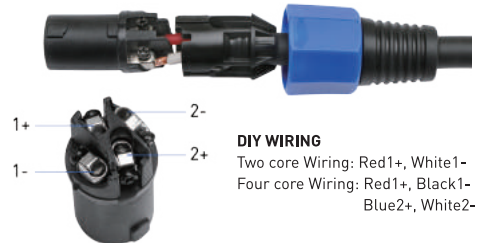

Step 4: Final Assembly Check

- Conduct a visual inspection to ensure the connector is assembled correctly without any loose parts.
- Perform a functional test by connecting the Speakon connector to your speaker and amplifier and playing audio to check for any sound disruptions.

