

## 20 Gbps USB-C® Switch



## 20 Gbps USB-C® Switch

### What's in the Box:

- 1.1x USB-C Switch with attached pigtail cable
- 2.2x 20Gbps USB4 cables (3.3ft)
- 3.1x RF Remote Control
- 4.2x Hook-and-Loop Pad
- 5.1x Contact Card

### Step-by-Step Setup:

#### 1. Connect the USB-C Switch to Your Monitor or Docking Station

- o Plug the attached pigtail cable from the switch into your USB-C or Thunderbolt monitor or docking station.

#### 2. Connect the Two Computers

- o Use the included USB4 cables to connect the two computers to the switch's USB-C ports.

#### 3. Power the Switch (optional)

- o The USB-C port near the attached pigtail cable is not for charging the host computer. Use a 5V charger if the host computer cannot provide enough power for the switch.

#### 4. Remote Installation


- o Remove the insulating tab from the end of the battery.
- o The remote control is pre-paired with the switch. To pair a new remote, connect the switch to the computer, then press and hold the Pair button on the remote for 5 seconds until the LED stops flashing. If you have multiple switches in the same room, unplug the others before pairing.



#### 5. Switch Between Computers

- o Use the included RF remote control to easily switch between the two connected computers.

## Connection Diagram:

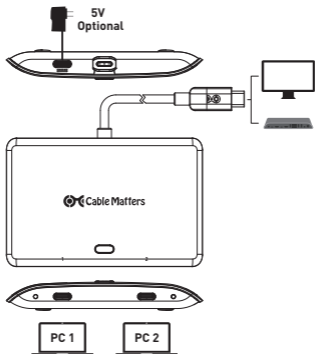

## Technical Specifications:

Host Connector: USB-C Male

Data Transfer Rate: Up to 20Gbps

Power Delivery: up to 140W power delivery pass-through

Video Output Support:

- 8K (7680x4320) @ 30Hz

- 5K (5128x2880) @ 60Hz

- 4K (3840x2160) @ 144Hz

\*When connecting the USB-C switch to a Thunderbolt 3 laptop, dock, or monitor, it will support only ONE display with a max resolution of 4K@60Hz.

Switching Method:

- RF remote control

- Switch Button

Switch Dimensions: 4.03 x 2.65 x 0.55 (inch)

Switch Weight: 0.17 pound

### Notes:

- Supports up to 8K@30Hz, 5K@60Hz, or 4K@144Hz video resolution, depending on your setup.

- Ensure your monitor or docking station supports USB-C or Thunderbolt 4 for full functionality.

### **Customer Support and Contact Information**

Cable Matters offers lifetime technical support as an integral part of our commitment to provide industry leading solutions. Email us with any questions at [support@cablematters.com](mailto:support@cablematters.com).

### **Warranty Information**

This product is backed by a limited one-year warranty. Cable Matters warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair or replaced with equivalent products at our discretion. The warranty covers parts and labor costs only. Cable Matters does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

### **Limitation of Liability**

In no event shall Cable Matters Inc. (including their officers, directors, employees or agents) be liable for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of, or related to the use of this product exceeding the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

### **FCC Compliance Statement**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1) This device must not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

Cable Matters® is a registered trademark or trademark of Cable Matters Inc. All rights reserved. All other trademarks are the property of their respective owners.

USB Type-C® and USB-C® are trademarks of USB Implementers Forum.

Contact [support@cablematters.com](mailto:support@cablematters.com) for questions